


Rotary Switches

Two Position, Single Pole



NTE Type No.	Circuitry	Action		Cylinder	Actuator	Diag No.
54-541	SPST	ON	OFF	Nylon 66	Nylon 66	S29a
54-542	SPST	ON	OFF	Steel	Brass Plated Steel	S29b

S29

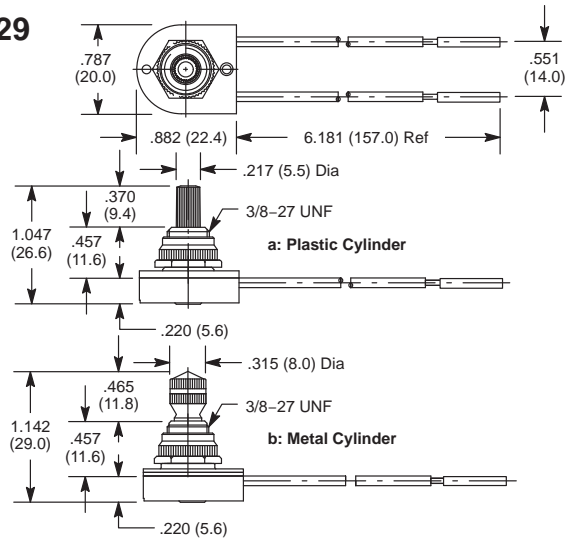

Specifications

Current Rating: 6A 125VAC, 3A 250VAC, 1A 125VDC
Contact Resistance: 20 Milliohms initial (max.)
Insulation Resistance: 100 Megohms (min.) at 500VDC
Dielectric Strength: 1000V RMS (min.) for 1 minute
Operation Force: 400 plus/minus 200 gram
Temperature Rating: +32° to +149°F (0° to +65°C)
Electrical Life: 6000 cycles
Mechanical Life: 50,000 cycles
Terminal Type: 18 AWG, 6" length
Mounting Hole: .393 (10.0)