RLY9175

22–Pin Blade Socket

Features

- **Flange Mount**
- **Solder Terminals**

Electrical Rating:

300 Volts, 10 Amps

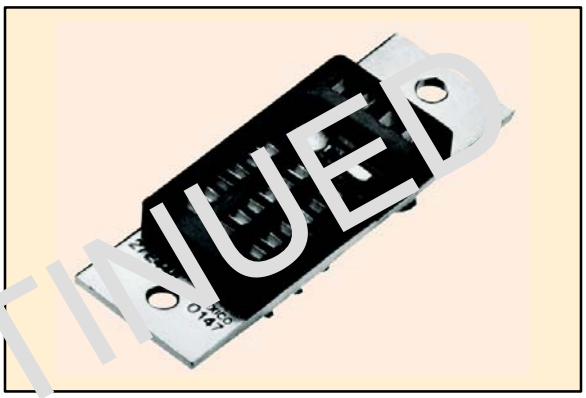

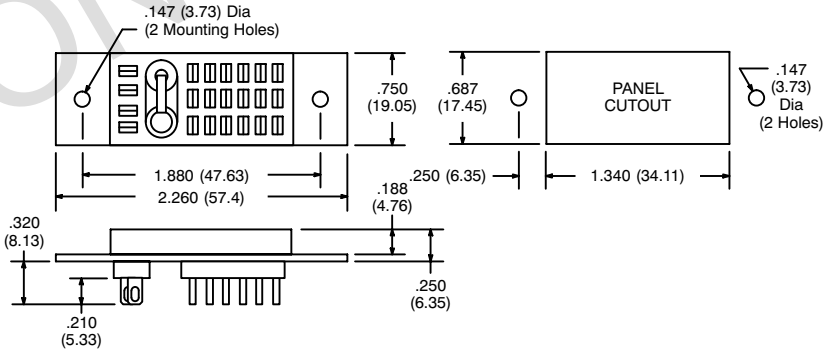

DISCONTINUED

RLY9183

2 Auxiliary Switches for Reversing Contactor Applications

Features

- **For RLY700 Series**

Electrical Rating:

Contacts . . . . . SPDT
Maximum Current . . . . . 5A @ 125/250 VAC

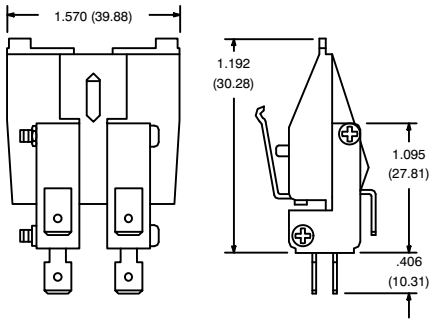

RLY9184

4 Auxiliary Switches for Reversing Contactor Applications

Features

- **For RLY700 Series**

Electrical Rating:
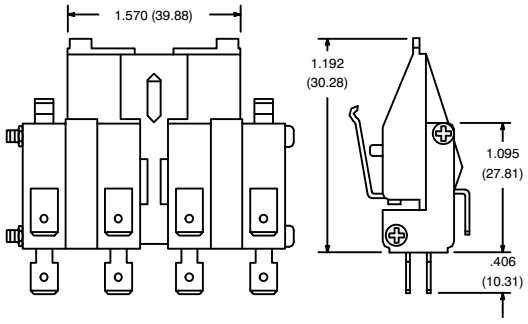
Contacts . . . . . SPDT
Maximum Current . . . . . 5A @ 125/250 VAC