


# Waterproof Miniature Illuminated Rocker



## Features

- Single Pole
- Waterproof: IP65
- .187" Quick Connect Terminals

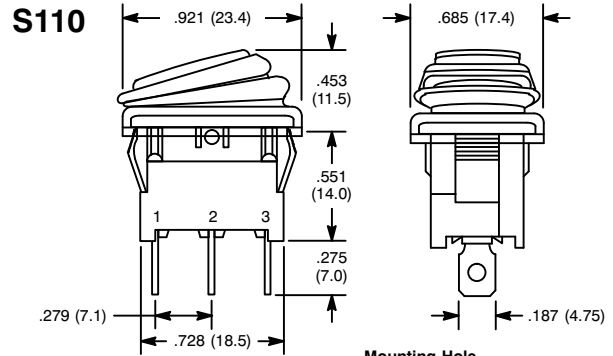

Mounting Hole

Panel Thickness	X
.030 (.750) - .059 (1.50)	.764 (19.40)
.059 (1.50) - .098 (2.50)	.780 (19.80)

Mounting Hole Dimensions: .512 (13.0)

NTE Type No.		Action			Actuator				Diag No.
					Material	Color		Vltg	
						Neon	LED		
54-200W	SPST	ON	NONE	OFF	PC	Red	-	AC	S110
54-201W	SPST	ON	NONE	OFF	PC	-	Red	DC	S110
54-202W*	SPDT	ON	NONE	ON	PC	Black		N/A	S110
54-203W	SPST	ON	NONE	OFF	PC	Green	-	AC	S110
54-204W	SPST	ON	NONE	OFF	PC	-	Green	DC	S110

\* Designates Non-Illuminated Type

## Specifications


**Current Rating:** 16A 125VAC 1/3 HP, 10A 250VAC 1/2 HP  
**Lens Color:** See Table  
**Lamp Voltage:** 110V Neon (AC) & 12V LED (DC)  
**Insulation Resistance:** 100 Megohms (min.) at 500VDC  
**Dielectric Strength:** 1000V RMS (min.)  
**Temperature Rating:** +32°F to +185°F (0°C to +85°C)  
**Electrical Life:** 10,000 cycles  
**Mechanical Life:** 50,000 cycles at full load  
**Terminal Type:** .187" Tab Q.C.  
**Mounting Hole:** See Table 1

# Waterproof Round Illuminated Rocker



## Features

- Single Pole
- Waterproof: IP65
- .187" Quick Connect Terminals

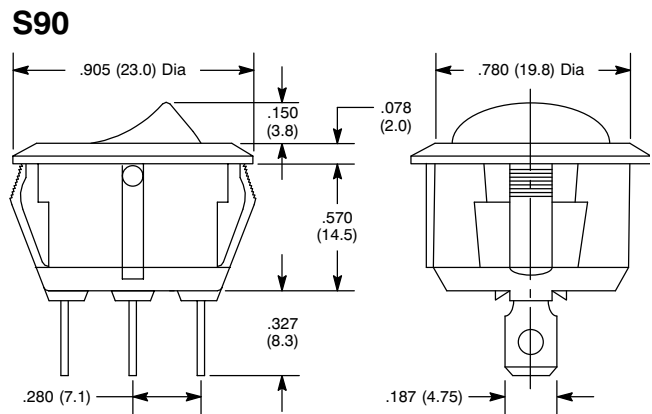

## Specifications

**Current Rating:** 16A 125VAC, 10A 250VAC  
**Lens Color:** See Table  
**Lamp Voltage:** 110V Neon (AC) & 12V LED (DC)  
**Insulation Resistance:** 100 Megohms (min.) at 500VDC  
**Dielectric Strength:** 1500V RMS (min.)  
**Temperature Rating:** +32°F to +185°F (0°C to +85°C)  
**Electrical Life:** 10,000 cycles  
**Mechanical Life:** 50,000 cycles at full load  
**Terminal Type:** .187" Tab Q.C.  
**Mounting Hole:** .795 (20.2)

NTE Type No.		Action			Actuator				Diag No.
					Material	Color		Vltg	
						Neon	LED		
54-503W*	SPST	ON	NONE	OFF	Nylon	Black		N/A	S90
54-526W	SPST	ON	NONE	OFF	Nylon	Green	-	AC	S90
54-527W	SPST	ON	NONE	OFF	Nylon	-	Red	DC	S90
54-529W	SPST	ON	NONE	OFF	Nylon	-	Green	DC	S90
54-531W	SPST	ON	NONE	OFF	Nylon	Red	-	AC	S90

\* Designates Non-Illuminated Type